


Industrieweg 6
6245 HW Eijsden
Nederland

Telefoon +31 - (0)43 - 361 94 91

www.jasperstransformatoren.nl
info@jasperstransformatoren.nl
K.v.K. Z-Limburg 14625609

Driefasen transformatoren uitvoering VDU

Primair ≤ 3x600V
Secundair ≤ 3x600V
Bescherming IP00, IPXX
T_{omgeving} 40°C
Isolatieklasse E/F
Frequentie 50-60 Hz
Beschermingsklasse I
Normering XPTQ2/8

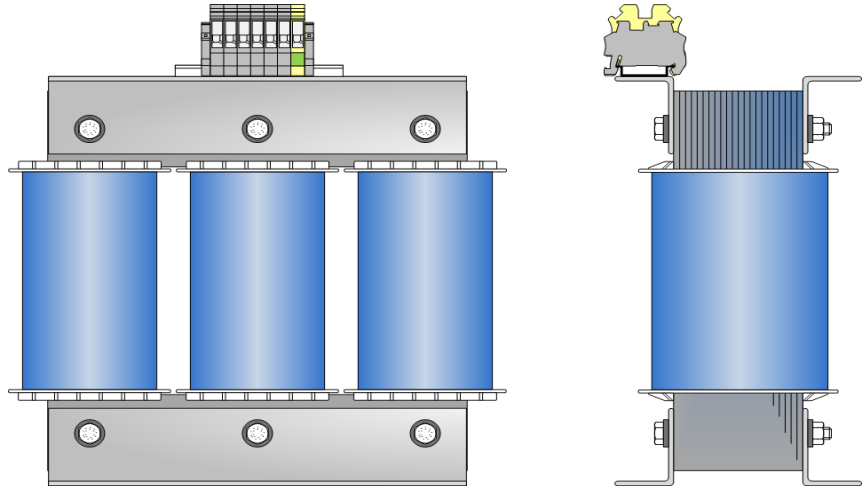

Type	Rating	Artikelgroep	Rendement	Spannings bereik	Normering	Gewicht	B (mm)	H (mm)	D (mm)	E (mm)	F (mm)
VDU015	150VA	3101		≤ 3x600V	UL	2.5	116	112	66	90	52
VDU025	250VA	3102		≤ 3x600V	UL	3.5	146	135	70	113	53
VDU036	360VA	3103		≤ 3x600V	UL	5	146	135	84	113	68
VDU05	500VA	3104		≤ 3x600V	UL	6	176	157	80	136	60
VDU1	1.000VA	3105		≤ 3x600V	UL	12	224	198	94	176	75
VDU1.5	1.500VA	3106		≤ 3x600V	UL	18	224	198	118	176	98
VDU2	2.000VA	3107		≤ 3x600V	UL	23	260	286	125	200	95
VDU3	3.000VA	3108		≤ 3x600V	UL	34	295	320	140	224	113
VDU4	4.000VA	3109		≤ 3x600V	UL	41	295	320	167	224	140
VDU5	5.000VA	3110	95%	≤ 3x600V	UL	44	295	320	167	224	140
VDU6.3	6.300VA	3111		≤ 3x600V	UL	49	355	370	158	264	130
VDU8	8.000VA	3112		≤ 3x600V	UL	52	355	370	173	264	145
VDU10	10.000VA	3113		≤ 3x600V	UL	64	355	370	188	264	160
VDU12.5	12.500VA	3114		≤ 3x600V	UL	76	355	370	188	264	160
VDU16	16.000VA	3115	96.5%	≤ 3x600V	UL	85	480	455	230	400	140
VDU20	20.000VA	3116		≤ 3x600V	UL	100	480	455	245	400	155
VDU25	25.000VA	3117		≤ 3x600V	UL	123	540	505	220	450	130